




CAMERA IMMERGEABLE AL-UWR36IR

Immergeable 50 mètres




Caractéristiques Camera

Vision même dans la nuit
 Grande qualité d'image
 Immersion possible jusqu'à 50 mètres
 Idéal pour les tuyauteries, conduits et réseaux
 Livré avec 30 mètres de câble. Option 50,100m
 Fixation par pas fileté sur le dessus, dessous et à l'arrière de la Caméra

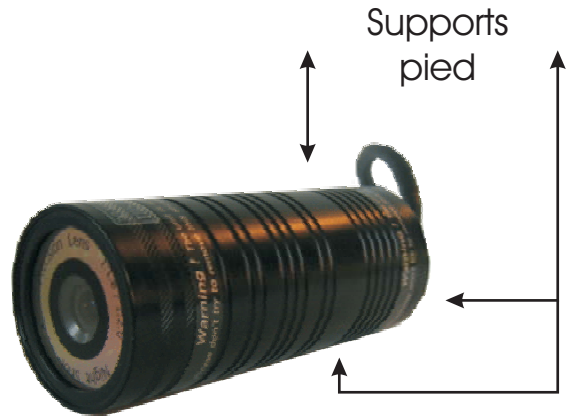

Spécifications

Image sensor	1/3" Super sensitive Color CCD
Effective Pixels	NTSC : 512(H)X492(V) PAL : 500(H)X582(V)
H.Resolution	380 TV Lines
Synchronizing system	Internal
Scanning system	EIA 525 Lines CCIR 625 Lines 2:1 Interlaced
Video output	1.0Vp-p Composite. 75 Ohms
S/N ratio	More than 50 dB (AGC Off)
Min. Illumination	0.3 Lux at F2.0 w/o LED, 0 Lux at F2.0 w/ LED
BLC	Automatic
White balance	2100°K -9100°K Auto 4dB~32dB Auto
Gain Control	R=0.45
Gamma correction	0.005%
Smear effect	EIA : 1/60 ~1/100,000 sec -
Shutter speed	CCIR : 1/50 ~1/100,000 sec
MTBF	80,000 hours
Power source	DC12V
Operation current	130mA w / regulated 12Vac in
Lens Standard	3.6mm (92°)
Option	4.3mm(78°), 6.0 mm (54°), 8.0mm (39°)
Operating Temperature	-10° C~ + 50° C
Humidity	Within 90% RH
Output Terminal	30M DIY cable with BNC-Female for Video, DC Jack-Male for Power
Measurement (mm)	37(D)x70(L)
Weight(Approx.g)	1850
Optional Feature 1	External Audio with C-Microphone " - 35dB / mV "
Optional Feature 2	Sunroof

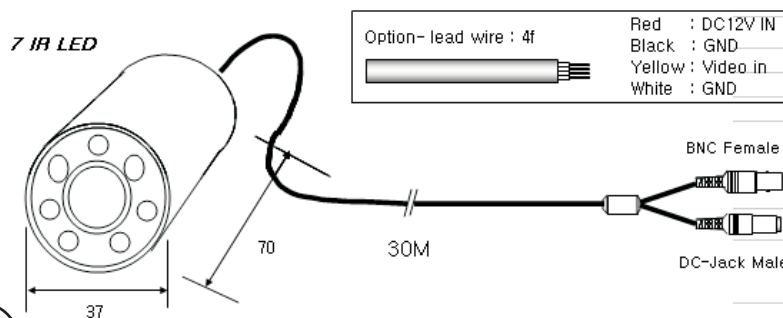

Votre revendeur



ALLWAN SECURITY
 Tél. 0 825 600 625 - Fax. 0 825 600 623
 info@allwan.fr - www.allwan.fr

