




**ALLWAN SECURITY  
France**

## SE325i Outdoor Intelligent IR Camera

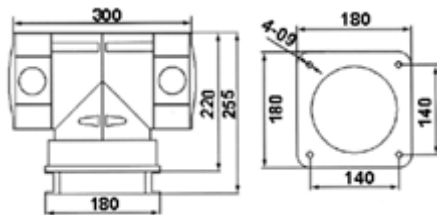

### Features:

- Infrared LED range up to 100 meters, perfect night vision, Weather proof, Aluminum shell, IP66
  - Shock proof, proper car surveillance
  - 360° continuous pan, 180° blind less tilt
  - 6 cruising tracks, 16 presets each track, total 128 presets, camera position (angle) display, 1 shuttle scan
  - 10.5~18VDC vehicle power, 24VAC local power optional, camera wiper equipped
  - OSD, 6 privacy masks, 4 alarms in 1 out
- In case of auto carrying, tailor-made SE325-A shock absorber is recommended
- Camera picks different suffix with different functions

suffix	Day/night	Zone masking	WDR	480TVL	420TVL
-45	ii	ii	ii	*	ii
-480	*	*	*	*	ii
-454	*	*	*	*	ii
-310	*	ii	ii	*	ii
-980	*	*	*	*	ii

Model	SE325i-980	SE325i-480	SE325i-454	SE325i-310
Image sensor	1/4"CCD			
Active pixels	752H*582V	752H*582V	758H*592V	795H*596V
Synchronization	Internal / External			
Video output	VBS1.0vP-P/75 OHMS			
Scanning frequency	15.625KHz/(H) 50Hz (V)			
Horizontal resolution	480TV lines	480TV lines	480TV lines	480TV lines
S/N ratio	50dB	50dB	50dB	50dB
Elec. shutter	1/3-1/10,000s	1/3-1/10,000s	1/3-1/10,000s	1/50-1/10,000s
Min. illumination	0 lux	0 lux	0 lux	0 lux
Focal length	f=3.5-91mm 312X	f=4.1-73.8mm 216X	f=3.6-82.8mm 230X	f=3.6-98mm 270X
Focal & iris	Auto/Manual			
Pan speed	0-80 <sub>i</sub> °/S ; preset speed 100 <sub>i</sub> °/S			
Tilt speed	0-40 <sub>i</sub> °/S; preset speed 60 <sub>i</sub> °/S			
Pan range	360 dgs continuously			
Tilt range	180 dgs blind less			
Preset	128 and 6 cruise paths 16 presets each track			
Communication	RS485, multi-protocol supported			
Relative humidity	90% without stem			
Work temperature	-35~+55 dgs C IP66			
Power supply	10.5-18VDC 3.5A, adapter provided or 24VAC standard power			
Compact standard	over 4G			
Weight	6Kg			