

## SD-807HP



### Features:

- Latest design with Amp electric outlet, compact structure, prompt radiator, convenient installation, and black cover which make an invisible monitor.
- OSD menu built-in, parameter and information can be displayed via the menu, and also set auto-preset, auto-scan, auto-cruise, AE mode and partly display etc.
- Pan and tilt position is displayed in Screen.
- After a period of out of service, automatically call auto-scan, auto-cruise, multi-scanning, and so on.
- 7 alarm input, 2 alarm output, and alarm linkage available. (Call back the function of presets, pattern, auto-scan, and auto-cruise).
- 128 presets (can be labeled with editable title). Can set auto-cruise through preset position (4 cruise tours)
- 4 pattern tours, and each record time is no less than 180s.
- 4 scan tours, and auto-scanning will carry out at appointed speed in the width range.
- Camera parameter: LG(SS-807HP)
- Outdoor Speed dome camera with heater :
  - The heater will turn on when the temperature under 5°
  - The heater will turn off when the temperature over 10°

### Specification:

#### Electrical

- Power supply : AC 24±4V
- Power consumption :10W (indoor), 50W (outdoor)

#### Operational

- Receiver : Built-in
- Motor : Stepping motor
- Sync system : External/internal
- Preset position : 128 presets, can be labeled with editable title
- Pan rotation range : Continuously 360°
- Manual pan speed : 0.4° - 320°/S

- Auto pan scan : 355° programmable
- Tilt rotation range : tilt 90°, with auto upset
- Manual vertical speed : 0.4° - 150°/S
- Preset time : < 1 s
- Communication : RS485-422,AD,BI-PHASS code , axis visual co
- Baud rate (RS485) : 2400/4800/9600/19200bps


#### Environmental

- Operating temperature : 0° ~ +50° (Indoor)
- 40° ~ +60°(Outdoor)
- Environmental humidity : 0 ~ 95% (no condensation)
- Protection grade : IP66, TVS1500w lightning proof & surge proof


#### Physical

- Dimension (mm) : Indoor: 300;Á215mm , Outdoor: 300;Á231mm
- Net weight (Kg) : 5.36kg (outdoor),4.45Kg (indoor)
- Gross weight (Kg) : 7.75Kg (outdoor), 6.84Kg (indoor)


#### SD-807HP /A

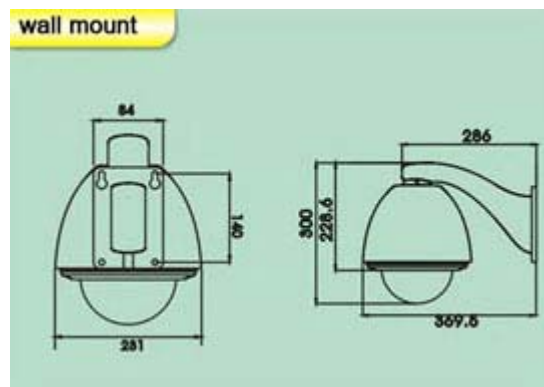

#### SD-807HP /B

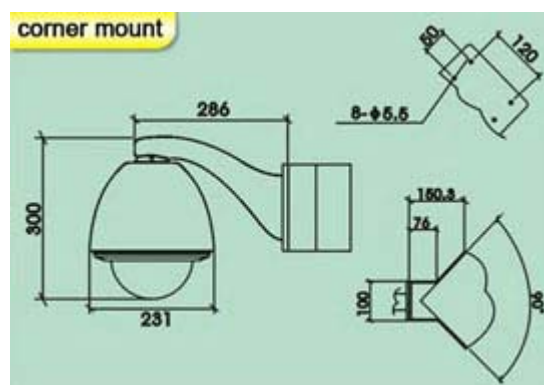

#### SD-807HP /C

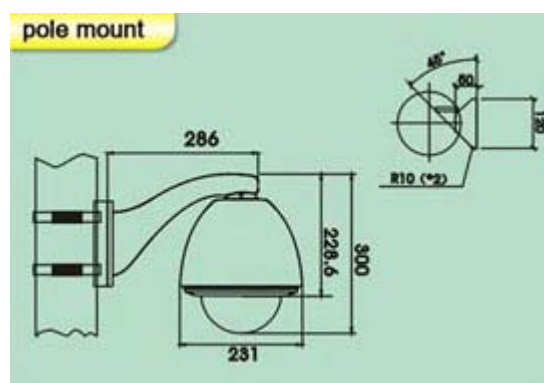

SD-807HP /D

ceiling mount

