



ALWAN SECURITY


Tel : 0 825 600 625

www.allwan.fr

info@allwan.fr

SE506W Outdoor Speed dome

Model	SE506W-980	SE506W-480	SE506W-454	SE506W-310
Image sensor			1/4" Sony Super HAD CCD	
Active pixels	740,000	752H*582V	758H*592V	795H*596V
Synchronization			Internal / External	
Video output			VBS1.0vP-P/75 OHMS	
Scanning frequency			15.625KHz/(H) 50Hz (V)	
Horizontal resolution	480TV lines	480TV lines	480TV lines	480TV lines
S/N ratio	50dB	50dB	50dB	50dB
Elec. shutter	1/3-1/10,000s	1/3-1/10,000s	1/3-1/10,000s	1/50-1/10,000s
Min. illumination	0.01lux	0.01lux	0.01lux	0.01lux
Focal length	f=4.1-73.8mm 312X	f=4.1-73.8mm 216X	f=3.6-82.8mm 230X	f=3.6-98mm 270X
Focal & iris			Auto/Manual	
Pan speed			0-240 dgs/S	
Tilt speed			0-100 dgs/S	
Pan range			360 dgs continuously	
Tilt range			90 dgs (180 dgs utmost flip)	
Preset			128, 4 Tracks 16 presets each	
Communication			RS485, 20 protocols supported	
Relative humidity			90% without stem	
Work temperature			-35~65 dgs C	
Power supply		12VDC/ 24VAC / 220VAC adapter provided		
Power consumption			35W	
Weight			10Kg	

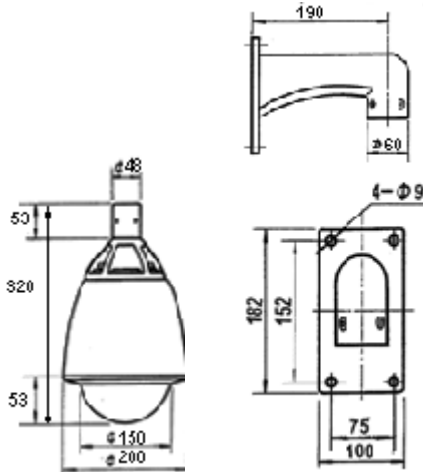

Features:

- Die-Cast aluminum, Double Dome Housing, heater blower thermo control, IP66
- OSD, 4 privacy masks (NB: this feature SE506-310 excluded)
- Camera ID editing, up to 511 addresses
- 360° continuous pan, 90° tilt, 180° flip, 4 cruising tracks, 16 presets each track, 128 presets totally
- RS485 multi-protocol, 1 channel shuttle scan
- Alarms 4 in 2 out, light strike proof

Camera picks different suffix with different functions

suffix	Day/night	Zone masking	WDR	480TVL	420TVL
-980	*	*	*	*	ii
-480	*	*	*	*	ii
-454	*	*	*	*	ii
-310	*	ii	ii	*	ii
-200L	*	ii	ii	ii	*